

07-20-00

A

Express Mail Label No. EL054597670US

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
49975(904)Total Pages in this Submission  
73**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

LENS, OPTICAL PICKUP DEVICE, AND METHOD FOR DETECTING LENS INCLINATION

and invented by:

IKUO NAKANO

1c865 U.S. PTO  
09/619279If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:
☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 57 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (*if applicable*)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (*if applicable*)
  - d. ☐ Reference to Microfiche Appendix (*if applicable*)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (*if drawings filed*)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
49975(904)

Total Pages in this Submission  
73

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets                      16
- b. ☐ Informal                      Number of Sheets                      \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449                      ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class    ☒ Express Mail *(Specify Label No.):* EL054597670US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
49975(904)

Total Pages in this Submission  
73

**Accompanying Application Parts (Continued)**


15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)  
Certified Copy of Japanese Patent Application No. 11-205194, Filed 7/19/99
16. ☐ Additional Enclosures (please identify below):

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

| For  | #Filed | #Allowed | #Extra | Rate      | Fee        |
|--|--------|----------|--------|-----------|------------|
| Total Claims   | 30     | - 20 =   | 10     | x \$18.00 | \$180.00   |
| Indep. Claims  | 10     | - 3 =    | 7      | x \$78.00 | \$546.00   |
| Multiple Dependent Claims (check if applicable) <input type="checkbox"/> |        |          |        |           | \$0.00     |
| <b>BASIC FEE</b>   |        |          |        |           | \$690.00   |
| <b>OTHER FEE (specify purpose)</b> Assignment Recordal                   |        |          |        |           | \$40.00    |
| <b>TOTAL FILING FEE</b>  |        |          |        |           | \$1,456.00 |

- ☒ A check in the amount of \$1,456.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 04-1105 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Dated: July 19, 2000

David G. Conlin (Reg. No. 27026)  
Dike Bronstein, Roberts & Cushman  
Intellectual Property Practice Group  
EDWARDS & ANGELL, LLP  
130 Water Street, Boston, MA 02109  
617-523-3400

cc:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **Ikuo Nakano**

Docket No.

**49975(904)**Serial No.  
Not Yet AssignedFiling Date  
Filed HerewithExaminer  
Not Yet AssignedGroup Art Unit  
Not Yet Assigned

Invention:

**LENS, OPTICAL PICKUP DEVICE, AND METHOD FOR DETECTING LENS INCLINATION**I hereby certify that this **UTILITY PATENT APPLICATION***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under  
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

**July 19, 2000***(Date)***Holly F. Malarney***(Typed or Printed Name of Person Mailing Correspondence)*  
*(Signature of Person Mailing Correspondence)***EL054597670US***("Express Mail" Mailing Label Number)*

Note: Each paper must have its own certificate of mailing.

LENS, OPTICAL PICKUP DEVICE, AND  
METHOD FOR DETECTING LENS INCLINATION

FIELD OF THE INVENTION

The present invention relates to lenses mounted in an optical pickup device and other devices, the optical pickup device having the lens, and a method for detecting lens inclination.

BACKGROUND OF THE INVENTION

As a conventional technique, for example, Japanese Unexamined Patent Publication No. 116438/1998 (Tokukaihei 10-116438, published on May 6, 1998) discloses a method for detecting inclination of an object lens in an optical pickup device. The method is discussed referring to Fig. 16.

In Fig. 16, an object lens 101 has a curved surface (lens functioning section) 101a acting as a lens, and a ring-shaped plane surface 101b at the circumference. The normal direction of the plane surface 101b virtually conforms to an optical axis direction of the object lens 101.

Light is emitted from a light source 102, is transmitted through a pin hole 103, which is disposed ahead of the light source 102, is converted into a parallel light pencil through a collimate lens 104, is reflected on a beam splitter 105, and is emitted into the object lens 101.

Light emitted into the object lens 101 is partially reflected on the curved surface 101a and the plane surface 101b and the rest passes through the object lens 101. In this case, the reflectivity depends upon a refractive index of a material forming the object lens 101, and an entry angle of light. Normally, light has a small reflectivity of several percents.

Light reflected on the curved surface 101a and the plane surface 101b is transmitted through the beam splitter 105, and is directed to a light-receiving element 107 through the collimate lens 106. A CCD and the like is used as the light-receiving element 107.

Light reflected on the plane surface 101b forms a condensing spot on a point of the light-receiving element

107, and light reflected on the curved surface 101a forms a spot expanding around the condensing spot. Here, a position of a condensing spot on the light-receiving element 107 is detected so as to detect the inclination of the object lens 101. The condensing spot is formed by light reflected on the plane surface 101b.

This conventional arrangement detects the inclination of the object lens 101 by detecting on the light-receiving element 107 a condensing spot position of light which is reflected from the plane surface 101b. However, on the light-receiving element 107, a light spot is formed by the curved surface 101a around a condensing spot formed by the plane surface 101b, so that it is difficult to separate the condensing spot of the plane surface 101b and the spot of the curved surface 101a, resulting in deterioration in accuracy of detecting a position of a condensing spot formed by the plane surface 101, namely, accuracy of detecting the inclination of the object lens 101.

Moreover, in view of light reflected from the beam splitter 105 as well, the accuracy of detecting is further deteriorated. To be specific, light reflected from a surface of the beam splitter 105 is also emitted onto the light-receiving element 107; however, the beam splitter 105 also has a plane surface, so that a condensing spot is formed on a point of the light-receiving element 107. The

reflectivity on the surface of the beam splitter 105 is virtually the same as that of the plane surface 101b of the object lens 101; thus, it is further difficult to separate the condensing spots on the light-receiving element 107.

In order to solve the above problem, Japanese Unexamined Patent Publication No. 59172/1994 (Tokukaihei 6-59172, published on March 4, 1994) discloses that the plane surface 101b has a reflecting part for increasing reflected light.

However, with this arrangement, it is difficult to, for example, sufficiently eliminate the influence of the curved surface 101a and to detect the inclination of lens with high accuracy of detecting.

Further, for example, a combination of a plurality of lenses is also applicable for the object lens; however, Japanese Unexamined Patent Publication No. 116438/1998 does not disclose inclination detection of a lens having such an arrangement.

#### SUMMARY OF THE INVENTION

The objective of the present invention is to provide a lens for detecting inclination with high accuracy, an optical pickup device, and a method for detecting lens inclination.

In order to attain the above objective, a lens of the



present invention includes:

a curved surface having a function as a lens,

a plane surface disposed in a virtually perpendicular direction to an optical axis, and

a reflecting part which is disposed on the plane surface, reflects light within a predetermined waveband with reflectivity higher than the curved surface, and transmits light outside the waveband.

According to this arrangement, the lens includes the curved surface and the plane surface, and the plane surface is disposed in a virtually perpendicular direction to an optical axis.

In a conventional optical pickup device and the like including a lens having such a construction, light is emitted to the lens and lens inclination is detected according to a position of a condensing spot which is formed by light reflected from the plane surface. However, light reflected from the curved surface of the lens also forms a light spot around the condensing spot for detecting inclination, so that it was not possible to separate the condensing spot formed by light reflected from the plane surface to detect lens inclination. Thus, lens inclination could not be detected with sufficient accuracy. Further, the conventional art is not devised to achieve both of the following characteristics: inclination with high accuracy is

detected by using light reflected from the lens, and stray light is positively prevented that is resulted from unnecessary light reflected on the lens.

Meanwhile, according to the arrangement of the present invention, the reflecting part is disposed on the plane surface, and the reflecting part reflects light within a predetermined waveband with reflectivity higher than the curved surface and transmits light outside the waveband.

Hence, light within a predetermined waveband is reflected on the reflecting part with reflectivity higher than the curved surface, so that a condensing spot of the reflected light is larger in quantity of light as compared with a light spot reflected from the curved surface. In this way, a condensing spot reflected from the reflecting part can be separated from other spots based on a difference in quantity of light, so that lens inclination can be detected with sufficiently high accuracy. Moreover, a condensing spot used for detecting inclination has a large quantity of light so as to improve sensitivity for detection.

In addition, the reflecting part transmits light outside the waveband; therefore, light used for recording and reproducing a signal in an optical pickup device is positively transmitted but does not cause stray light in the device.

For this reason, the lens having the above construction of the present invention is used for the optical pickup device and the like so as to detect lens inclination with high accuracy and to positively prevent stray light occurring in the device.

Furthermore, in order to attain the foregoing objective, an optical pickup device of the present invention includes:

a plurality of lenses disposed in an optical axis direction with predetermined intervals,

assuming that a receiving side for inclination detection light is a front side, each of the lenses having a plane surface disposed on a front-facing surface thereof in a virtually perpendicular direction to the optical axis,

a plurality of the lenses each being larger in diameter than the preceding one.

According to this arrangement, a plurality of the lenses are disposed in an optical axis direction with predetermined intervals, and each of the lenses has the plane surface in a virtually perpendicular direction to an optical axis. Regarding a plurality of the lenses disposed in this manner, inclination needs to be detected for each of the lenses.

Thus, according to the arrangement of the present invention, assuming that the light-receiving side for

inclination detection is the front side, each of the lenses has the plane surface on the front thereof. A plurality of the lenses are each larger in diameter than the preceding one.

Consequently, the light can be positively emitted to the plane surface of the lens without interfering with light emitted to the following lens for detecting inclination. Hence, inclination of the lenses can be separately detected according to positions of condensing spots formed by light reflected from the plane surfaces of the lenses.

Besides, in order to attain the foregoing objective, a method for detecting lens inclination of the present invention includes:

a step 'a' of emitting light for detecting inclination to a plurality of lenses so as to emit the light to plane surfaces thereof, the plane surfaces being disposed in a virtually perpendicular direction to an optical axis, the lenses being disposed in an optical axis direction with predetermined intervals, and

a step 'b' of detecting a position of a condensing spot formed by light reflected from said plane surface on each of the lenses.

According to this method, light for detecting inclination is emitted to the plane surfaces of the lenses, and positions of condensing spots are each detected, which

are formed by light reflected from the plane surfaces. Thus, inclination can be detected for each of the lenses.

For a fuller understanding of the nature and advantages of the invention, reference should be made to the ensuing detailed description taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1(a) is an elevational view showing a lens of one embodiment of the present invention. Fig. 1(b) is a side view showing the same.

Fig. 2 is a schematic view showing the entire arrangement of a lens inclination detector including the lens shown in Fig. 1.

Fig. 3(a) is an elevational view showing another example of the lens shown in Fig. 1. Fig. 3(b) is a side view showing the same.

Fig. 4(a) is an elevational view showing still another example of the lens shown in Fig. 1. Fig. 4(b) is a side view showing the same.

Fig. 5 is a schematic view showing the entire arrangement of a lens inclination detector in accordance with another embodiment of the present invention.

Fig. 6(a) is an elevational view showing combined lenses of Fig. 5, taken in an optical axis direction. Fig.

6(b) is a side view showing the same. Fig. 6(c) is an elevational view showing a lens with smaller diameter of the combined lenses shown in Fig. 6(a), taken in an optical axis direction. Fig. 6(d) is a side view showing the same. Fig. 6(e) is an elevational view showing a lens with larger diameter of the combined lenses shown in Fig. 6(a), taken in an optical axis direction. Fig. 6(f) is a side view showing the same.

Fig. 7 is an explanatory view showing that two lenses are inclined to each other in the arrangement of Fig. 5.

Fig. 8 is a diagram showing the entire arrangement of another example of the inclination detector shown in Fig. 5, in which light reflected from reflecting parts of two lenses is divided before detection.

Fig. 9(a) is an elevational view showing another example of the combined lenses shown in Fig. 6(a), taken in an optical axis direction. Fig. 9(b) is a side view showing the same. Fig. 9(c) is an elevational view showing a lens with smaller diameter of the combined lenses shown in Fig. 9(a), taken in an optical axis direction. Fig. 9(d) is a side view showing the same. Fig. 9(e) is an elevational view showing a lens with larger diameter of the combined lenses shown in Fig. 9(a), taken in an optical axis direction. Fig. 9(f) is a side view showing the same.

Fig. 10 is a schematic view showing the entire

arrangement of a lens inclination detector in accordance with still another embodiment of the present invention.

Fig. 11 is an elevational view showing a light-shielding member of Fig. 10.

Fig. 12 is a schematic view showing the entire arrangement of an optical pickup device, which includes (adopts) the lens inclination detector of Fig. 5.

Fig. 13(a) is an elevational view showing a combined lens tube of Fig. 12, taken in an optical axis direction. Fig. 13(b) is a longitudinal section showing the combined lens tube.

Fig. 14(a) is an elevational view showing another example of the combined lens tube shown in Fig. 13, taken in an optical axis direction. Fig. 14(b) is a longitudinal section showing the combined lens tube.

Fig. 15 is a longitudinal section showing another example of the combined lens tube shown in Fig. 14(b).

Fig. 16 is a schematic view showing the entire arrangement of a conventional lens inclination detector.

#### DESCRIPTION OF THE EMBODIMENTS

##### [EMBODIMENT 1]

Referring to Figs. 1(a) and 1(b) to 4(a) and 4(b), the following explanation describes one embodiment of the present invention.

As shown in Fig. 2, a lens inclination detector 1 of the present embodiment is provided with a light source 11 for emitting a light beam, a pin hole plate 12 having a pin hole 12a, a collimate lens 13, a beam splitter 14, a collimate lens 15, a light-receiving element composed of a CCD and the like, and a lens 17.

As shown in Figs. 1(a) and 1(b), the lens 17 has a lens functioning section 17a, which acts as a lens and has convex and curved surfaces, and a plane surface 17b at the circumference. The plane surface 17b has a surface normal direction virtually conforming to an optical axis direction of the lens 17.

The lens 17 can be normally manufactured in a glass or plastic mold. In this case, a surface normal direction of the plane surface 17b is determined by the accuracy of the mold. A mold normally has considerably high accuracy, so that the optical axis direction of the lens 17 can conform to the surface normal direction of the plane surface 17b with high accuracy.

On the plane surface 17b, a reflecting part 18 is formed on the same surface as a plane face of the lens functioning section 17a. The reflecting part 18 is formed on a surface on the side where the lens 17 forms a focus. An aluminum film is formed into the reflecting part 18 by vacuum deposition method, etc.



A light-receiving element such as CCD, which is capable of detecting the position of a condensing spot on a light-receiving surface, is applicable as the light-receiving element 16.

According to this arrangement, light is emitted from the light source 11, is transmitted through the pin hole 12a of the pin hole plate 12, is converted into a parallel light pencil through the collimate lens 13, is reflected on the beam splitter 14, and is emitted onto the lens 17.

The light emitted onto the lens 17 is partially reflected on the curved surface 17a, but the light mostly passes through the lens 17; meanwhile, the light is largely reflected on the reflecting part 18 of the plane surface 17b.

The light reflected on the curved surface 17a and the plane surface 17b is transmitted through the beam splitter 14 and is directed through the collimate lens 15 to the light-receiving element 16.

The light reflected from the plane surface 17b forms a condensing spot on a point of the light-receiving element 16; meanwhile, the light reflected from the curved surface 17a forms a spot expanding around the condensing spot. And then, the position of the condensing spot formed by the plane surface 17b is detected on the light-receiving element 16 so as to detect the inclination of the lens 17.

In this case, on the light-receiving element 16, a light spot is formed by the curved surface 17a around a condensing spot of the plane surface 17b, and a condensing spot is further formed by light reflected from the beam splitter 14. However, a condensing spot formed by the plane surface 17b has a relatively large quantity of light because of the reflecting part 18. Thus, a condensing spot formed by the plane surface 17b can be readily separated on the light-receiving element 16.

In this way, the reflecting part 18 is formed on the plane surface 17b so as to improve the reflectivity of light on the plane surface 17b. Therefore, it is possible to detect light reflected from the plane surface 17b of the lens 17. Further, an aluminum film is used as the reflecting part 18, so that the range of choices is larger regarding a wavelength of the light source 11, which is used for detecting the inclination of the lens 17. Moreover, an aluminum film is used as the reflecting part 18, so that the reflecting part 18 can be readily formed by vacuum deposition. Consequently, the lens 17 can be mass-manufactured at low cost.

Here, the lens 17 can include reflecting parts 19 shown in Fig. 3(a) instead of the reflecting part 18. Unlike the reflecting part 18, the reflecting parts 19 are not formed into a ring but into a partial arc on the plane surface 17b,

specifically, on three places of the plane surface 17b.

The number of reflecting parts 19 is not particularly limited as long as the reflecting parts 19 are provided on one or more places. Additionally, the shape of the reflecting part 19 is not particularly limited. As shown in Fig. 4(a), a circular shape is also applicable.

Here, regarding the reflecting parts 18 and 19, it is more desirable to stack a dielectric film on an aluminum film than to use a single layer made of aluminum. Thus, in this case, the reflectivity can be further improved as compared with a single layer made of aluminum. Therefore, with an inexpensive arrangement, it is possible to further improve the accuracy of detecting the inclination of the lens 17 based on reflected light (returned light) from the reflecting parts 18 and 19. Such a dielectric film is made of a material including  $MgF_2$ ,  $TiO_2$ , and  $SiO_2$ .

Also, the reflecting parts 18 and 19 can be composed of dielectric films. The reflecting parts 18 and 19 can be formed by, for example, stacking a multiple-layer dielectric film. This arrangement is more preferable than an aluminum film because only light within a specific waveband is reflected.

Additionally, the following explanation discusses the construction using the lens inclination detector 1 for the optical pickup device. When an infrared ray is used as a

signal recording/reproducing light of a recording medium in the optical pickup device, the reflecting parts 18 and 19 are composed of a dielectric film, which transmits an infrared light and reflects light outside the waveband, so that stray light appearing in the optical pickup device can be prevented. In this case, the inclination of the lens 17 can be detected based on light waveband outside the infrared region (for example, green and blue). Such a dielectric film is made of a material including  $\text{MgF}_2$ ,  $\text{TiO}_2$ , and  $\text{SiO}_2$ .

Further, when the lens 17 is a mold lens made of glass and plastic or a lens manufactured by grinding, it is also possible to mount later the plane surface 17b to the lens 17 to detect the inclination of the lens 17.

As described above, the lens 17 of the present invention is provided with the curved surface 17a acting as a lens, the plane surface 17b disposed in a virtually perpendicular direction to an optical axis, and the reflecting parts 18 and 19, which are disposed on the plane surface 17b, reflect light being within a predetermined waveband with a reflectivity higher than the curved surface 17a, and transmit light outside the waveband. It is therefore possible to achieve position adjustment using light reflected from the reflecting parts 18 and 19, and reduction in stray light in a recording and reproducing process.

[EMBODIMENT 2]

Referring to Figs. 5 to 9 (a) and 9(f), the following explanation describes another embodiment of the present invention. Here, for convenience of explanation, those means that have the same functions described in the means of the forgoing figures are indicated by the same reference numerals and the description thereof is omitted.

As shown in Fig. 5, a lens inclination detector 2 of the present embodiment is provided with a light source 11, a pin hole plate 12, a collimate lens 13, a beam splitter 14, a collimate lens 15, and a light-receiving element 16. Further, a combination of a plurality of lenses, i.e., lenses 21 and 22 are provided instead of a single lens 17. Additionally, the lenses 21 and 22 are disposed with a predetermined distance in a direction of an optical axis.

Of the lenses 21 and 22, the lens 21 with a smaller diameter is composed of a planoconvex lens, as shown in Figs. 6(a), 6(b), 6(c), and 6(d). Like the lens 17, the lens 21 includes a planoconvex plane surface 21b on a side of a plane face of a planoconvex lens functioning section 21a at a circumference thereof. A reflecting part 21c is formed on the plane surface 21b. The arrangement of a reflecting part 18 can be selectively adopted as the reflecting part 21c.

Like the plane surface 17b, the plane surface 21b has

a surface normal direction virtually conforming to an optical axis direction of the lens 17. The reflecting part 21c is formed on the same surface as the plane surface of the lens functioning section 21a, namely, on a surface on the side for forming a focus of the lens 21. When the lens 21 is used for, for example, an optical pickup device, the reflecting part 21c is formed in an area other than an area for transmitting light into the lens 21, namely, other than the lens functioning section 21a.

Here, when light for performing recording and reproducing in the optical pickup device is within a different waveband from light for detecting the inclination of the lens 21, and when the reflecting part 21c is composed of a dielectric film which reflects light for detecting inclination of the lens 21 and transmits light for recording and reproducing, the reflecting part 21c can be also formed so as to entirely cover one of the surfaces of the lens 21. This arrangement is applicable to the other embodiments as well. The above dielectric film is made of a material such as  $MgF_2$ ,  $TiO_2$ , and  $SiO_2$ .

With this arrangement, a reflection preventive film of the lens functioning section 21a and a reflecting film acting as the reflecting part 21c can be simultaneously formed as a single film. Thus, it is more possible to mass-manufacture the lens. The same arrangement is adopted for

the lens 22.

Moreover, as shown in Figs. 6(a), 6(b), 6(e), and 6(f), regarding the lens 22 with a larger diameter, one surface of the lens functioning section 22a is concave and the other surface is convex. On the concave surface at the circumferential of the lens functioning section 22a, the plane surface 22b is formed in the same manner as the lens 21. On the side of the concave surface of the lens functioning section 22a, the reflecting part 22c is formed on the plane surface 22b.

The lens 22 is disposed such that the concave surface thereof opposes the convex surface of the lens 21. Further, the lenses 21 and 22 are arranged such that the reflecting parts 21c and 22c do not overlap each other in an optical axis direction even when the lenses are inclined. In the present embodiment, the outer diameter of the lens 21 is virtually the same as the concave surface of the lens functioning section 22a of the lens 22, that is a parallel light receiving side, and is smaller than the outer diameter of the concave surface. With this arrangement, when inclination of the lenses 21 and 22 is detected, it is possible to simultaneously detect light reflected back from the reflecting parts 21c and 22c of the two lenses 21 and 22.

Besides, in the present embodiment, the reflecting

parts 21c and 22c of the two lenses 21 and 22 are virtually the same in area, so that a quantity of light reflected back from the reflecting part 21c of the lens 21 is almost equal to that from the reflecting part 22c of the lens 22 upon detecting inclination of the lenses 21 and 22. With this arrangement, the lens inclination detecting optical system can readily detect light reflected back from the two lenses of lenses 21 and 22, by using only a single light-receiving element 16.

Meanwhile, when the above lenses 21 and 22 are quite different from each other in quantity of returned light, it is necessary to perform operations including switching the sensitivity of the light-receiving element 16. Hence, the working efficiency may be deteriorated. Moreover, for example, in the case of the planoconvex lens 21, light is also reflected from a part other than the reflecting part. Thus, it is also possible to set the areas of the reflecting parts 21c and 22c in view of a quantity of the reflected light.

The quantities of light reflected from the reflecting parts 21c and 22c can be adjusted by changing a film thickness of an aluminum film as well as changing the areas of the reflecting parts 21c and 22c, in the case of the reflecting parts 21c and 22c composed of aluminum films.

With this arrangement, as shown in Fig. 5, light is



emitted from the light source 11, is converted into a parallel light pencil through the collimate lens 13, is reflected on the beam splitter 14, and is emitted into a combined structure of the lenses 21 and 22. Light emitted to the lens 21 is reflected on the plane face of the lens functioning section 21a, that faces the beam splitter 14, because the lens 21 is a planoconvex lens. And the light is reflected on the reflecting part 21c. Meanwhile, light passing the outside of the lens 21 is emitted to the plane surface 22b of the lens 22 and is reflected on the reflecting part 22c. Light reflected back from the lenses 21 and 22 forms condensing spots on the light-receiving element 16 through the collimate lens 15.

As shown in Fig. 5, when the lenses 21 and 22 have the same inclination, the condensing spots of light reflected back from the lenses 21 and 22 are formed on the same place on the light-receiving element 16.

In contrast, as shown in Fig. 7, when the lenses 21 and 22 are inclined to each other, the condensing spots of light reflected back from the lenses 21 and 22 are formed on different places on the light-receiving element 16. Thus, the inclination of the lenses 21 and 22 is adjusted such that the positions of the spots coincide with each other on the light-receiving element 16, thereby realizing the coincidence of inclination of the lenses 21 and 22.

As described above, the lens inclination detector 2 is capable of detecting inclination of the lenses 21 and 22 according to the positions, on the light-receiving element 16, of the condensing spots formed by light reflected back from the lenses 21 and 22.

In this case, the lens inclination detector 2 is devised to detect the inclination of the lenses 21 and 22 according to the positions of the condensing spots formed by light reflected back from the reflecting parts 21c and 22c on the lenses 21 and 22. Even when the lenses 21 and 22 are integrally provided as members of the optical pickup device, it is possible to detect inclination of the lenses 21 and 22 and relative inclination therebetween.

Additionally, the lens inclination detector 2 may be arranged such that the reflecting parts 21c and 22 of the lenses 21 and 22 are composed of dielectric multi-layer films in which layers respectively reflect light beams within different wavebands, and light reflected back from the lenses 21 and 22 is divided by, for example, a dichroic prism. This arrangement makes it possible to separately detect inclination of the lenses 21 and 22.

Such an arrangement is illustrated in Fig. 8. In this arrangement, light reflected from reflecting parts 21c and 22c is divided at a dichroic prism 71, and the light is respectively detected by the collimate lens 15 and the

light-receiving element 16; and a collimate lens 72 and a light-receiving element 73.

For example, in the case of an optical pickup device including the lenses 21 and 22, when a waveband of light emitted to the lenses 21 and 22 for recording and reproducing is a red band, light reflected from the reflecting parts 21c and 22c of the lenses 21 and 22 can respectively have a blue band and a green band. This arrangement makes it possible to, for example, reduce the influence of stray light in the optical pickup device. The reflecting parts 21c and 22c can be composed of a dielectric film made of a material such as  $MgF_2$ ,  $TiO_2$ , and  $SiO_2$ .

Further, for example, when light having two wavebands of blue and red is used for recording and reproducing in the optical pickup device, it is also possible to form the reflecting parts 21c and 22c for reflecting light in a green waveband on the lenses 21 and 22. Moreover, the inclination of the lenses 21 and 22 can be measured with a single color camera. The reflecting parts 21c and 22c can be composed of a dielectric film made of a material such as  $MgF_2$ ,  $TiO_2$ , and  $SiO_2$ .

Also, in the lens inclination detector 2, when detecting lens inclination, a parallel light pencil is emitted to the lenses 21 and 22 having a combined structure. With this arrangement, it is possible to detect inclination

regardless of the positions of the lenses 21 and 22 with respect to an optical axis direction and the positions of the lenses 21 and 22 with respect to a plane face with an optical axis serving as a surface normal.

In contrast, in the case of a focused light pencil, the two lenses 21 and 22 are aligned in a direction of an optical axis, so that the size of a condensing spot on the light-receiving element 16 is changed according to the positions of the lenses 21 and 22 with respect to an optical axis. Consequently, the accuracy of detecting the inclination of the lenses 21 and 22 is deteriorated.

Moreover, the reflecting parts 21c and 22c that reflect a light pencil for detecting lens inclination are provided on the plane surfaces 21b and 22b of the lenses 21 and 22; thus, even in the event of a positional shift between a) the center of the light pencil for detecting lens inclination and b) an optical axis of the lenses 21 and 22, it is possible to detect the inclination of the lenses 21 and 22. Meanwhile, when the reflecting parts 21c and 22c are provided on, for example, the curved surfaces of the lenses 21 and 22, it is necessary to provide a step of previously coinciding a) the center of a light pencil for detecting lens inclination with b) the center of an optical axis of the lens.

Additionally, even when the reflecting parts are not

provided on the lenses having a combined structure, the same effect can be achieved. In this case, in the combined structure of the lenses, the following arrangement is necessary: a plurality of lenses are aligned in a direction of an optical axis; the plane surfaces having a normal direction virtually conforming to an optical axis direction are provided on the circumferences, the circumferences being on the side for receiving parallel light; and when the front is a side for receiving parallel light, the lens on the back needs to be larger in outer diameter than the lens at the front.

Furthermore, as shown in Figs. 9(a) and 9(b), in the lens inclination detector 2 of the present embodiment, lenses 23 and 24 having a combined structure can be used instead of the lenses 21 and 22 having a combined structure.

As shown in Figs. 9(a), 9(b), 9(c), and 9(d), the lens 23 is arranged such that the reflecting part 21c is not formed on the lens 21. A lens functioning section 23a corresponding to the lens functioning section 21a is provided, and a plane surface 23b corresponding to the plane surface 21b is provided.

As shown in Figs. 9(a), 9(b), 9(e), and 9(f), the lens 24 is provided with a lens functioning section 24a, a plane surface 24b, and a reflecting part 24c, that respectively correspond to the lens functioning section 22a, the plane

surface 22b, and the reflecting part 22c of the lens 22. Although the lens 24 is virtually identical to the lens 22, the plane surface 24b, i.e., a width of the reflecting part 24c is smaller than the plane surface 22b, i.e., a width of the reflecting part 22c.

With this arrangement, the plane surface 24b of the lens 24, i.e., a width of the reflecting part 24c is reduced so as to omit the reflecting part of the lens 23, thereby adjusting the balance between quantities of light reflected back from the lenses 23 and 24.

As described above, in view of quantities of light reflected back from the lenses, all the lenses do not require the reflecting part in the case of the combined lenses. Depending on quantities of light reflected from the lenses, the reflecting part may be provided on at least one of the lenses. In the case of such an arrangement as well, it is possible to detect relative inclination between the lenses and to adjust the inclination.

Further, the lenses 21 and 23 are described as planoconvex lenses, and the lenses 22 and 24 are described as lenses having concave and convex surfaces. Here, the curved surface (lens functioning section) having a lens function is not particularly limited in shape. For example, a lens having convex surfaces can be also adopted for the lenses 21 to 24.

Also, in the above description, two lenses are used in the combined structure; however, more lenses can be combined therein.

[EMBODIMENT 3]

Referring to Figs. 10 and 11, the following explanation describes still another embodiment of the present invention. Here, for convenience of explanation, those means that have the same functions described in the means of the foregoing figures are indicated by the same reference numerals and the description thereof is omitted.

As shown in Fig. 10, a lens inclination detector 3 of the present embodiment is provided with the combined lens structure including a) a lens 17 as a small-diameter lens having convex surfaces and provided on the side facing a light source 11 and b) a lens 22 as a large-diameter lens having convex and concave surfaces. The outer diameter of the lens 17 is virtually the same as that of the lens functioning section 22a or smaller than that. The circumference of the lens 17 and the reflecting part 22c of the lens 22 do not overlap each other in a direction of an optical axis.

In an optical path between a beam splitter 14 and the lenses 17 and 22, a light-shielding member 25 is disposed. As shown in Fig. 11, the light-shielding member 25 is provided with a shielding part 25a for shielding light and

a transmitting part 25b for transmitting light. The shielding part 25a is provided for preventing a light pencil emitted from the light source 11 from entering the lens functioning section 17a of the lens 17. The area of the shielding part 25a corresponds to that of the lens functioning section 17a.

This arrangement makes it possible to prevent light reflected on the lens functioning section 17a of the lens 17 from entering the light-receiving element 16 so as to improve accuracy of detecting the inclination of lens. When the lens functioning section 17a has a large radius of curvature and a larger quantity of light is likely to be emitted to the light-receiving element 16, this arrangement is particularly effective in shielding light.

Although the light-shielding member 25 is provided with the shielding part 25a and the transmitting part 25b, the transmitting part 25b is not mandatory. In the light-shielding member 25, the transmitting part 25b is provided such that a holding mechanism (not shown) supports the transmitting part 25b so as to dispose the shielding part 25a in an optical path without shielding it.

Moreover, the shielding part 25a is preferably capable of absorbing light to prevent stray light from entering the light-receiving element 16.

In the case of another embodiment as well, the light-



shielding member 25 is capable of preventing light reflected on the curved surface of the lens from entering the light-receiving element 16 as mentioned above.

[EMBODIMENT 4]

Referring to Figs. 12, 13(a) and 13(b), the following explanation describes still another embodiment of the present invention. Here, for convenience of explanation, those means that have the same functions described in the means of the forgoing figures are indicated by the same reference numerals and the description thereof is omitted.

In the present embodiment, as shown in Fig. 12, a lens inclination detector 2 is used for detecting inclination of an object lens of an optical pickup device 31.

The optical pickup device 31 is provided with an LD (Laser Diode) light source 32, a collimate lens 33, a standing mirror 34, a combined lens tube 35 composed of lenses 21 and 22, a lens tube driving mechanism 36, and an inclination adjusting disk 37.

The collimate lens 33 converts light emitted from the LD light source 32 into parallel light. The standing mirror 34 directs light passing through the collimate lens 33 to the lenses 21 and 22 disposed in the combined lens tube 35. The mirror driving mechanism 36 drives the combined lens tube 35 and adjusts the inclination of the combined lens tube 35. The mechanism for adjusting inclination can be

provided either inside the combined lens tube 35 or outside thereof. When the mechanism is disposed outside the tube 35, the combined lens tube 35 is fixed after inclination adjustment. Here, the lens tube driving mechanism 36 is equivalent to a tracking mechanism and a focusing mechanism of a general optical pickup device and has a conventional construction.

As shown in Figs. 13(a) and 13(b), the combined lens tube 35 includes a cylinder 41. In the cylinder 41, a holding member 42 is provided for holding the lens 21, which is disposed between the lens 22 and an adjusting disk 37, and a holding member 43 for holding the lens 22, which is disposed between the lens 21 and the outside.

In the holding member 42, for example, three arc-shaped light-transmitting holes 42a are formed to transmit light for detecting the inclination of the lens. The positions of the light-transmitting holes 42a correspond to that of a reflecting part 22c on a plane surface 22b of the lens 22. With this arrangement, in the combined lens tube 35, the light-transmitting holes 42a are formed on the holding member 42, which overlaps the reflecting part 22c of the lens 22 in an optical axis direction, so as to secure an optical path for detecting lens inclination.

Regarding the above arrangement, the following explanation discusses a method for detecting inclination of

the combined lens tube 35. Here, the lenses 21 and 22 are mounted into the combined lens tube 35 after inclination adjustment. Further, in the optical pickup device 31, the reference of inclination is, for example, a guide axis (not shown) for a seek of the optical pickup device 31. An optical axis of the lens inclination detector 2, the guide axis, and the inclination detecting disk 37 are previously fixed with predetermined inclination.

A parallel light pencil emitted from a light source 11 through a beam splitter 14 is reflected on the inclination detecting disk 37 and the plane surface and the reflecting part of the lens 21 or 22 before being directed to the combined lens tube 35, and the light forms a condensing spot on the light-receiving element 16 according to inclination. Here, the lenses 21 and 22 are fixed into the combined lens tube 35 after detecting inclination, so that the condensing spots of light reflected from the lenses 21 and 22 are formed on the same place on the light-receiving element 16.

Hence, on the light-receiving element 16, the inclination of the combined lens tube 35 is adjusted such that a condensing spot of light reflected from the inclination detecting disk 37 conforms to a condensing spot of light reflected from the combined lens tube 35, i.e., light reflected from lenses 21 and 22; thus, the inclination of the combined lens tube 35 can conform to the reference

inclination of the optical pickup device 31. The inclination of the combined lens tube 35 is adjusted by the lens tube driving mechanism 36.

As described above, when the optical pickup device 31 is provided with a lens including a plane surface having a surface normal direction virtually conforming to an optical axis direction, or a combination including at least one lens or more, it is possible to readily detect and adjust the inclination of the lens acting as an object lens. Consequently, it is possible to improve the signal quality of an optical disk apparatus including the optical pickup device 31.

[EMBODIMENT 5]

Referring to Figs. 14(a), 14(b) and 15, the following explanation describes still another embodiment of the present invention. Here, for convenience of explanation, those means that have the same functions described in the means of the forgoing figures are indicated by the same reference numerals and the description thereof is omitted.

The present embodiment is arranged such that an optical pickup device 31 of Fig. 12 is provided with a combined lens tube 51 shown in Figs. 14(a) and 14(b) in place of a combined lens tube 35. In the combined lens tube 51, one of the combined lenses (in this case, lens 21) is capable of independently moving in an optical axis direction so as to

correct spherical aberration, which is caused by an error in thickness of an information recording medium (e.g. an optical disk) disposed on the position of an inclination adjusting disk 37.

As shown in Fig. 14(b), in the combined lens tube 51, the lens 21 is supported by an end of a leaf spring 54 via a magnet 52 and a yoke 53, and the other end of the leaf spring 54 is mounted into a cylinder 55. A coil 56 is disposed in a U-shaped part composed of the magnet 52 and the yoke 53 outside the magnet 52. The coil 56 is supported by the cylinder 55 via a supporting member 57. Further, the magnet 52, the yoke 53, and the coil 56 constitute a magnetic circuit. Current is applied to the coil 56 so as to move the lens 21 in an optical axis direction.

Meanwhile, the lens 22 is held by a lens holding member 58 provided in the cylinder 55 and is fixed therein.

Furthermore, as shown in Fig. 14(a), notches 59 are formed to secure optical paths for detecting lens inclination on the yoke 53, and the magnet 52 is divided at the notches 59.

Here, Figs. 14(a) and 14(b) show a construction in which the coil 56 is disposed outside the magnet 52 in a direction of a diameter of the lens 21. However, as shown in Fig. 15, the positions of the coil 56 and the magnet 52 can be reversed.

Moreover, in the foregoing examples, regarding the holding members 42, 43, and 58 for holding the lenses 21 and 22 of a combined structure, the arrangement is not particularly limited. Namely, it is only necessary to allow a light pencil for detecting inclination to reach the plane surfaces of the lenses 21 and 22 or the reflecting part of the plane surface, by providing notches or holes on the holding member, the cylinder, and other members of the combined lens tube to secure the optical paths. This arrangement makes it possible to detect the inclination of the lenses 21 and 22 in a state in which the lenses 21 and 22 are mounted into the combined lens tube. Therefore, after the lenses 21 and 22 are mounted into the combined lens tube, an error in mounting the lenses 21 and 22 can be confirmed with ease.

Additionally, when the combined lens tube includes an inclination adjusting mechanism for the lenses 21 and 22, it is possible to fix the lenses 21 and 22 in the combined lens tube while measuring the inclination of the lenses 21 and 22. Thus, an error in mounting the lenses 21 and 22 can be reduced.

A lens inclination detector of the present invention, in which parallel light is emitted to a plane surface, and the inclination of the lens is detected based on the reflected light, the lens including the plane surface at a

circumference thereof, the plane surface having a normal direction virtually conforming to an optical axis direction, is characterized by including on the plane surface a reflecting part for reflecting only parallel light within a predetermined waveband.

According to this arrangement, the reflecting part reflects light within a predetermined waveband and transmits light outside the waveband. Therefore, when the lens inclination detector is used for an optical pickup device, the reflecting part reflects light for detecting lens inclination and transmits light for performing recording and reproducing in the optical pickup device.

Consequently, when the lens inclination detector is used for the optical pick up device, the following adverse effect can be prevented: when light for recording and reproducing in the optical pickup device is reflected on the reflecting part, the reflected light is returned (stray light) to a light-receiving element and a light source of the optical pickup device, thereby causing malfunction in the optical pickup device.

In the lens inclination detector, the reflecting part can be composed of a dielectric film.

Further, the lens inclination detector can be also arranged such that the reflecting part is formed on the surface of the lens functioning section as well as on the

plane surface, the lens functioning section being disposed at the inner radius of the plane surface and acting as a lens.

According to this arrangement, of reflecting parts composed of dielectric films, the reflecting part formed on the plane surface acts as a reflecting film which reflects light within a predetermined waveband, i.e., light for detecting lens inclination; meanwhile, the reflecting part formed on the lens functioning section acts as a reflection preventive film for preventing reflection of light on the surface of the lens, regarding light outside the waveband, e.g., light for recording and reproducing in the optical pickup device.

Therefore, when the lens inclination detector is used for the optical pickup device, it is possible to simultaneously form the reflecting film on the plane surface of the lens and the reflection preventive film of the lens functioning section as the reflecting film. Thus, the lens can be further mass-manufactured.

Moreover, a lens inclination detector of the present invention, in which a lens is provided, parallel light is emitted to a plane surface, and the inclination of the lens is detected based on the reflected light, the lens including the plane surface at a circumference thereof, the plane surface having a normal direction virtually conforming to an



optical axis direction, is characterized in that a reflecting part for reflecting the parallel light is formed on the plane surface, and the reflecting part is composed of an aluminum film and a dielectric film that are stacked in this order on the plane surface.

According to this arrangement, the reflecting part has a laminated structure composed of an aluminum film and a dielectric film; hence, even when the plane surface of the lens is small, it is possible to efficiently reflect parallel light for detecting lens inclination. This arrangement makes it possible to further increase a quantity of reflected light at low cost without increasing a lens diameter. Additionally, the accuracy of detecting lens inclination can be improved.

Also, a lens inclination detector of the present invention, in which a lens is provided, parallel light is emitted to a plane surface, and the inclination of the lens is detected based on the reflected light, the lens including the plane surface at a circumference thereof, the plane surface having a normal direction virtually conforming to an optical axis direction, is characterized in that a plurality of the lenses are aligned in an optical axis direction, assuming that a receiving side of the parallel light is the front, the reflecting part for reflecting the parallel light is formed on the plane surface of one or more lenses

disposed at the second and later from the front, and the diameter is set such that the reflecting part does not overlap the preceding lens in an optical axis direction.

According to this arrangement, regarding a combination of a plurality of lenses aligned in an optical axis direction, it is possible to detect the inclination of a predetermined lens having the reflecting part. Further, when the front of the front lens is flat, the lens can obtain light reflected from a wide area without forming the reflecting part. Therefore, in this case, the front side has a larger quantity of light so as to detect inclination with higher accuracy.

Moreover, when detecting parallel light reflected from the reflecting part, the lens diameter is set such that the reflecting part does not overlap the preceding lens in an optical axis direction, so that a detection operation can be positively carried out.

In the lens inclination detector, the following construction is also applicable: the lenses respectively have the reflecting parts which reflect the parallel light within different wavebands, and a reflected light separating means is provided for separating light reflected from the reflecting parts according to the wavebands.

According to this arrangement, parallel light components within different wavebands are respectively

reflected as light reflected from the reflecting parts of the lenses (the waveband differs between the parallel light components). The reflected light within different wavebands is reflected on the reflected light separating means, and inclination is detected on each of the lenses based on each reflected and separated light. Hence, it is possible to separately and accurately detect the inclination of the lenses.

For example, the following construction is applicable: a white light source is used as a light source for detecting inclination, the reflecting parts of the two lenses respectively reflect blue light and red light, and the reflected light separating means such as a dichroic prism separates the reflected light.

With this arrangement, when a plurality of the lenses are mounted into the lens tube, the inclination amount of the lenses can be measured after mounting, so that an error in mounting can be readily confirmed. Moreover, when a lens inclination adjusting mechanism is mounted into the lens tube, an error in mounting can be reduced.

Further, the lens inclination detector can be also arranged such that the reflecting parts are formed so as to equalize quantities of light reflected from the lenses.

According to this arrangement, the reflecting parts are formed so as to equalize the quantities of light reflected

from the lenses; thus, when light reflected from the lenses is detected by a single light-receiving element, it is possible to omit the step of adjusting the sensitivity of the light-receiving element according to a quantity of light reflected from each of the lenses and the step of controlling light emitted to the light-receiving element. This arrangement makes it possible to readily detect lens inclination.

Furthermore, the lens inclination detector can also have a construction in which a light-shielding member is provided in front of the front lens to prevent the parallel light from entering the lens functioning section, which is disposed at the inner radius of the plane surface and acts as a lens.

According to this arrangement, the light-shielding member can suppress the following adverse effect: the parallel light is emitted to the lens functioning section of the lens and the reflected light affects the accuracy of detecting lens inclination. Consequently, it is possible to improve the accuracy of detecting lens inclination.

A lens of the present invention is also arranged such that a plane surface has a normal direction virtually conforming to an optical axis direction and a reflecting part is provided on the plane surface to reflect only light within a predetermined waveband.

According to this arrangement, when the lens is used for an optical pickup device, the reflecting part reflects light for detecting lens inclination and transmit light for performing recording and reproducing in the optical pickup device. Consequently, the following adverse effect can be prevented: light for performing recording and reproducing in the optical pickup device is reflected on the reflecting part, and the reflected light is returned (stray light) to a light-receiving element and a light source of the optical pickup device, thereby causing malfunction in the optical pickup device.

The lens is also arranged such that the plane surface is formed at the circumference and the reflecting part is formed on a surface of a lens functioning section as well as on the plane surface, the lens functioning section being disposed at the inner radius of the plane surface and acting as a lens.

With this arrangement, of the reflecting parts, the reflecting part formed on the plane surface acts as a reflecting film which reflects light within a predetermined waveband, i.e., light for detecting lens inclination; meanwhile, the reflecting part formed on the lens functioning section acts as a reflection preventive film for preventing reflection of light on the surface of the lens, regarding light outside the waveband, e.g., light for

performing recording and reproducing in the optical pickup device.

Therefore, when the lens is used for the optical pickup device, it is possible to simultaneously form the reflecting film on the plane surface of the lens and the reflection preventive film of the lens functioning section as the reflecting film. Thus, the lens can be further mass-manufactured.

Additionally, the lens of the present invention has a construction in which the plane surface has a normal direction virtually conforming to an optical axis direction, and the reflecting part is composed of an aluminum film and a dielectric film, that are stacked in this order on the plane surface, so as to reflect light.

With this arrangement, the reflecting part has a laminated structure composed of an aluminum film and a dielectric film; hence, even when the plane surface of the lens is small, it is possible to efficiently reflect parallel light for detecting lens inclination. This arrangement makes it possible to further increase a quantity of reflected light at low cost without increasing a lens diameter. Additionally, the accuracy of detecting lens inclination can be improved.

Further, the optical pickup device of the present invention, which emits light beam condensed by combined

lenses to an optical recording medium, can also have a construction in which a plurality of the lenses constituting the combined lenses, each having the plane surface at the circumference on a surface facing the optical recording medium; of a plurality of the lenses, the reflecting part is formed at least on the plane surface of one of a plurality of the lenses so as to increase reflectivity of at least specific light emitted from the optical recording medium; and assuming that the side facing the optical recording medium is the front, the lens is larger in outer diameter than the preceding one.

With this arrangement, in the optical pickup device including a combination composed of a plurality of the lenses, which are aligned in an optical axis direction, it is possible to detect inclination of a predetermined lens on which the reflecting part is formed.

Moreover, assuming that the receiving side of parallel light is the front, the lens is larger in outer diameter than the preceding one; therefore, parallel light can be positively emitted onto the plane surface or the reflecting part at the circumference of each of the lenses. With this arrangement, regarding the combined lenses of the optical pickup device, it is possible to detect lens inclination based on light reflected from each of the lenses.

The optical pickup device can also have a construction

in which, the front lens of a plurality of the lenses has a flat front and a convex rear and the reflecting parts are formed at the circumferences of the lenses disposed at the second and later from the front.

This arrangement makes it possible to obtain a sufficient quantity of light reflected entirely from the plane surface of the front lens without forming the reflecting part thereon. Therefore, it is not necessary to form the reflecting part on the lens at the front, thereby readily manufacturing the combined lenses, namely, the optical pickup device at low cost.

The optical pickup device can also have a construction in which the lenses are provided with the reflecting parts which reflect light within different wavebands.

According to this arrangement, a parallel light component is reflected as light reflected from the reflecting part of each of the lenses. The waveband differs between the parallel light components. The reflected light having different wavebands is reflected on the reflected light separating means, and inclination is detected regarding each of the lenses based on each reflected and separated light. Hence, it is possible to separately and accurately detect inclination of each of the lenses.

For example, the following construction is applicable: a white light source is used as a light source for detecting



inclination, the reflecting parts of the two lenses respectively reflect blue light and green light, and the reflected light separating means such as a dichroic prism separates the reflected light.

With this arrangement, when a plurality of the lenses are mounted into the lens tube, the inclination amount can be measured on each of the lenses after mounting, so that an error in mounting can be readily confirmed. Moreover, when a lens inclination adjusting mechanism is mounted into the lens tube, an error in mounting can be reduced.

Further, the optical pickup device can also have a construction in which when parallel light is emitted to the combined lenses from the optical recording medium, the reflecting parts equalize quantities of light reflected from the lenses.

According to this arrangement, the reflecting parts equalize quantities of light reflected from the lenses; thus, when light reflected from the lenses is detected by a single light-receiving element, it is possible to omit the step of adjusting the sensitivity of the light-receiving element according to a quantity of light reflected from each of the lenses and the step of controlling light emitted to the light-receiving element. This arrangement makes it possible to readily detect lens inclination.

Furthermore, a method for detecting lens inclination of

the present invention, which detects inclination of the combined lens composed of a plurality of the lenses, each including the plane surface at least at the circumference with a normal direction virtually conforming to an optical axis direction, is characterized in that parallel light is emitted to the combined lenses and the inclination of the combined lenses is detected based on the reflected light.

According to this arrangement, when detecting lens inclination, parallel light is emitted to the combined lenses composed of a plurality of lenses, it is possible to use reflected light, particularly light reflected from the plane surface whose normal direction virtually conforms to an optical axis direction. Hence, the lens inclination can be readily detected and adjusted with high accuracy.

Additionally, the lens inclination detecting method is also arranged such that the reflecting part is formed on the plane surface of at least one of the combined lenses, the reflecting part being provided for increasing reflectivity of the parallel light, and the inclination of the combined lenses is detected based on light reflected from the reflecting part.

With this arrangement, the reflecting part is formed on the plane surface of at least one of the combined lenses to increase reflectivity of parallel light, thereby detecting lens inclination with higher accuracy.

The method for detecting lens inclination of the present invention, in which parallel light is emitted to the lens so as to detect the inclination based on the reflected light, the lens including the plane surface at least at the circumference with a normal direction virtually conforming to an optical axis direction, is characterized in that when detecting inclination, the light-shielding member prevents the parallel light from entering the lens functioning section, which is disposed at the inner radius of the plane surface and acts as a lens.

According to this arrangement, the light-shielding member can suppress the following adverse effect: the parallel light is emitted to the lens functioning section of the lens and the reflected light affects accuracy of detecting lens inclination. Consequently, it is possible to improve accuracy of detecting lens inclination, namely, accuracy of adjusting inclination.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A lens comprising:
  - a curved surface having a function as a lens,
  - a plane surface disposed in a virtually perpendicular direction to an optical axis, and
  - a reflecting part which is disposed on said plane surface, reflects light within a predetermined waveband with reflectivity higher than said curved surface, and transmits light outside the waveband.
2. The lens as defined as claim 1, wherein said reflecting part is formed so as to cover said plane surface and said curved surface.
3. The lens as defined in claim 1, wherein said reflecting part includes at least one dielectric film.
4. The lens as defined in claim 1, wherein said reflecting part includes at least one of an  $\text{MgF}_2$  film, a  $\text{TiO}_2$  film, and an  $\text{SiO}_2$  film.
5. The lens as defined in claim 1, wherein said reflecting part includes an aluminum film and a dielectric film which is provided thereon.

6. A lens comprising a plane surface whose normal direction virtually conforms to an optical axis direction, said plane surface being provided with a reflecting part for reflecting only light within a predetermined waveband.

7. The lens as defined in claim 6, wherein said plane surface is formed at a circumference of said lens, and said reflecting part is formed on a surface of a lens functioning section as well as on said plane surface, said lens functioning section acting as a lens at an inner radius of said plane surface.

8. A lens comprising a plane surface whose normal direction virtually conforms to an optical axis direction, said plane surface being provided with a reflecting part composed of an aluminum film and a dielectric film that are stacked in this order on said plane surface.

9. An optical pickup device comprising a lens including:

- a curved surface having a function as a lens,
- a plane surface disposed in a virtually perpendicular direction to an optical axis,
- a reflecting part which is disposed on said plane

surface, reflects light within a predetermined waveband with reflectivity higher than said curved surface, and transmits light outside the waveband.

10. An optical pickup device comprising a plurality of lenses disposed in an optical axis direction with predetermined intervals,

assuming that a receiving side for inclination detection light is a front side, each said lens being provided with a plane surface on a front-facing surface thereof in a virtually perpendicular direction to an optical axis, a plurality of said lenses each being larger in diameter than a preceding lens.

11. The optical pickup device as defined in claim 10, wherein each said lens includes a curved surface having a function as a lens, and

at least one of said lenses includes a reflecting part on said plane surface, said reflecting part reflecting light within a predetermined waveband with reflectivity higher than said curved surface.

12. The optical pickup device as defined in claim 11, wherein each said lens includes said reflecting part, and a wavelength differs between lenses regarding light

reflected on said reflecting part of each said lens.

13. The optical pickup device as defined in claim 10, wherein said reflecting part is formed on at least one of said lenses such that each said lens is equal in quantity of light reflected thereon for detecting inclination.

14. The optical pickup device as defined in claim 13, wherein said reflecting part is formed on said plane surface of each said lens, and

said reflecting part has a thickness such that each said lens is equal in quantity of light reflected thereon for detecting inclination.

15. The optical pickup device as defined in claim 13, wherein said reflecting part is formed on said plane surface of each said lens, and

said reflecting part has an area such that each said lens is equal in quantity of light reflected thereon for detecting inclination.

16. An optical pickup device, which emits a light beam condensed by combined lenses to an optical recording medium,

wherein a plurality of lenses constituting the combined lenses each have a plane surface on a surface thereof, that

faces an optical recording medium at a circumference of said lens, said plane surface having a normal direction virtually conforming to an optical axis,

a reflecting part is formed on at least said plane surface of one or more of a plurality of said lenses, said reflecting part increasing reflectivity of at least specific light received from the optical recording medium, and

assuming that a side facing the optical recording medium is a front side, each said lens is larger in outer diameter than a preceding lens.

17. The optical pickup device as defined in claim 16, wherein a front lens of said lenses is a planoconvex lens including a plane surface at a front and a convex surface at a rear, and said reflecting part is formed at the circumference of said lenses disposed at a second and later from said front side.

18. The optical pickup device as defined in claim 16, wherein said lenses are provided with said reflecting parts, each part reflecting light within a different waveband.

19. The optical pickup device as defined in claim 16, wherein said reflecting part is formed such that when parallel light is emitted to said combined lenses from the



optical recording medium, each said lens is equal in quantity of light reflected thereon.

20. A method for detecting lens inclination, said lens including:

a curved surface having a function as a lens,

a plane surface disposed in a virtually perpendicular direction to an optical axis, and

a reflecting part which is disposed on said plane surface, reflects light within a waveband with reflectivity higher than said curved surface, and transmits light outside the waveband,

said method comprising:

a step 'a' of emitting light for detecting inclination to said lens; and

a step 'b' of detecting a position of a condensing spot formed by light reflected from said reflecting part.

21. The method for detecting lens inclination as defined in claim 21, wherein in the step 'a', the light for detecting inclination is not emitted to said curved surface but only to said plane surface and said reflecting surface.

22. A method for detecting lens inclination comprising:

a step 'a' of emitting light for detecting inclination

to a plurality of lenses so as to emit the light to plane surfaces thereof, said lenses being disposed in an optical axis direction with predetermined intervals, said plane surfaces being disposed in a virtually perpendicular direction to an optical axis,

a step 'b' of detecting a position of a condensing spot formed by light reflected from said plane surface of each said lens.

23. The method for detecting lens inclination as defined in claim 22, wherein in the step 'a', parallel light is used as the light for detecting inclination.

24. The method for detecting lens inclination as defined in claim 22, wherein in the step 'a', light is reflected on a reflecting part provided on said plane surface of at least one of said lenses so as to form a condensing spot, which is larger in quantity of light than that of a spot formed by light reflected on a lens functioning section provided on each said lens, and

in the step 'b', the position of the condensing spot is detected.

25. The method for detecting lens inclination as defined in claim 22, wherein in the step 'a', light within

a different waveband for each said lens is reflected on a reflecting part provided on said plane surface of each said lens, and light reflected from said reflecting parts are separated from each other.

26. The method for detecting lens inclination as defined in claim 22, wherein in the step 'a', the light for detecting inclination is emitted to a reflecting part provided on said plane surface of each said lens, and light equal in quantity is reflected on each said reflecting part.

27. The method for detecting lens inclination as defined in claim 22, wherein in the step 'a', the light for detecting inclination is not emitted to a lens functioning part provided on each said lens but only to said plane surface.

28. A method for detecting lens inclination, that detects inclination of combined lenses including a plurality of lenses, each having a plane surface at least at a circumference thereof, said plane surface having a normal direction virtually conforming to an optical axis direction, said method comprising the step of emitting parallel light to said combined lenses and detecting inclination of said combined lenses based on light reflected therefrom.

29. The method for detecting lens inclination as defined in claim 28, wherein a reflecting part for increasing reflectivity of the parallel light is formed on said plane surface of at least one of said lenses included in said combined lenses, and

inclination of said combined lenses is detected based on light reflected from said reflecting part.

30. A method for detecting lens inclination, in which parallel light is emitted to a lens and inclination of the lens is detected based on light reflected therefrom, said lens including a plane surface at least at a circumference thereof, said plane surface having a normal direction virtually conforming to an optical axis direction,

said method comprising the step of, upon detecting inclination, preventing the parallel light from entering a lens functioning section by using a light-shielding member, said lens functioning section acting as a lens at an inner radius of said plane surface.

ABSTRACT OF THE DISCLOSURE

A lens includes a plane surface whose normal direction virtually conforms to an optical axis direction, and a reflecting part is provided on the plane surface to reflect only light within a predetermined waveband. Consequently, inclination of the lens can be detected with high accuracy.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223

FIG.1(a)




FIG.1(b)




FIG. 2

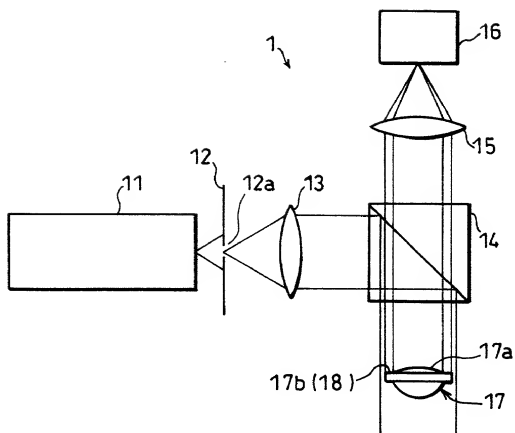


FIG. 3(a)




FIG. 3(b)






FIG. 4 (a)




FIG. 4 (b)





FIG. 6(a)




FIG. 6(c)




FIG. 6(e)




FIG. 6(d)



FIG. 6(b)




FIG. 6(f)




FIG.7

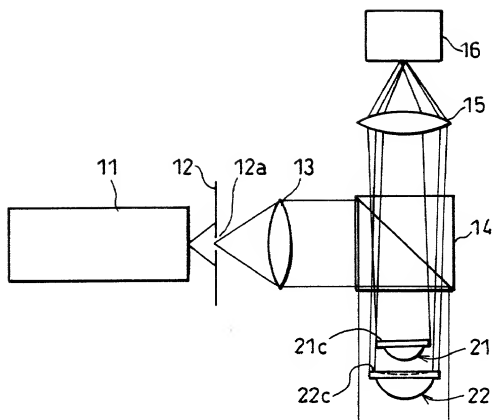


FIG. 8

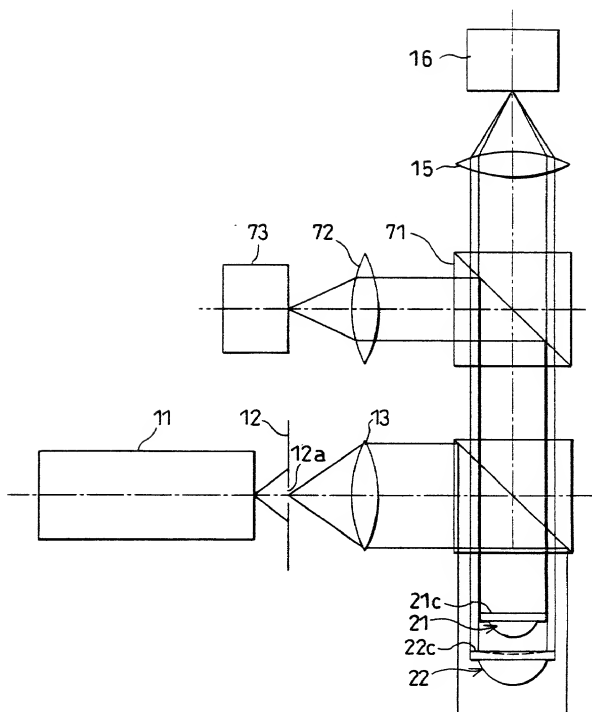




FIG. 10

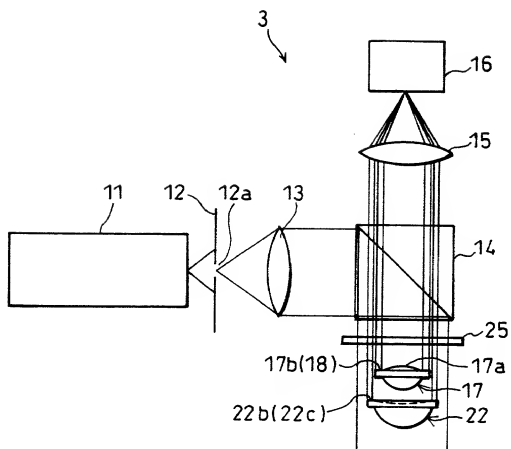






FIG.12

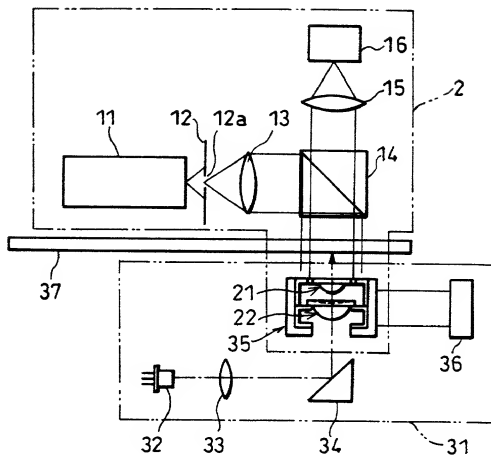


FIG. 13(a)

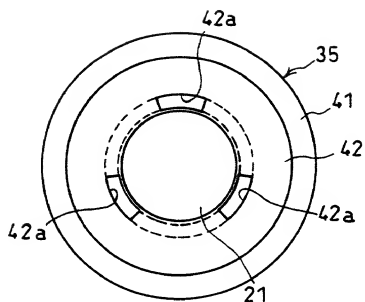


FIG. 13(b)

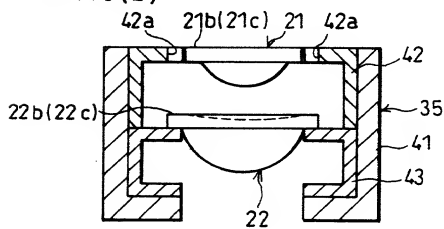


FIG. 14(a)

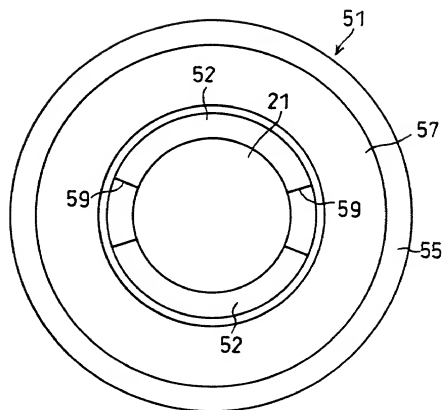


FIG. 14(b)

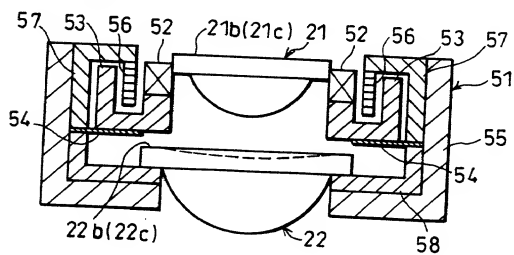


FIG. 15





FIG. 16

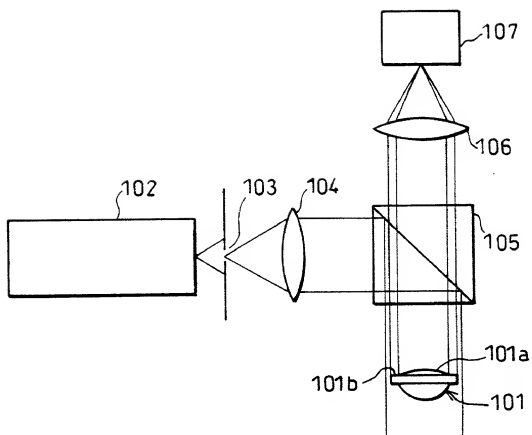

**Boston, Massachusetts 02109**

Attorney's Docket No.

Page 1 of 4

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed at 201) below or an original, first and joint inventor (if plural names are listed at 201-208 below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

LENS, OPTICAL PICKUP DEVICE, AND METHOD FOR DETECTING LENS INCLINATION

which is described and claimed in:

- ☒ the specification attached hereto.
- ☐ the specification in U.S. Application Serial Number \_\_\_\_\_, filed on \_\_\_\_\_.
- ☐ the specification in PCT international application Number \_\_\_\_\_,  
filed on \_\_\_\_\_; and was amended on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

[illegible]

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

| Prior U.S. Applications or PCT International Applications Designating the U.S-Benefit Under 35 U.S.C. §120 |                  |                          |         |           |  |
|--|------------------|--------------------------|---------|-----------|--|
| U.S. Applications  |                  | Status (Check One)       |         |           |  |
| Application Serial No.   | U.S. Filing Date | Patented                 | Pending | Abandoned |  |
|  |                  |                          |         |           |  |
|  |                  |                          |         |           |  |
|  |                  |                          |         |           |  |
| PCT Applications Designating the U.S.  |                  |                          |         |           |  |
| Application No.  | Filing Date      | U.S. Serial No. Assigned |         |           |  |
|  |                  |                          |         |           |  |
|  |                  |                          |         |           |  |
|  |                  |                          |         |           |  |

**CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)**  
(35 U.S.C. § 119(e))

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

| Applicant | Provisional Application Number | Filing Date |
|-----------|--------------------------------|-------------|
|           |                                |             |
|           |                                |             |

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) with full powers of association, substitution and revocation to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Sewall P. Bronstein (Reg. No. 16,919)  
David G. Conlin (Reg. No. 27,026)  
George W. Neuner (Reg. No. 26,964)  
Ernest V. Linek (Reg. No. 29,822)

Linda M. Buckley (Reg. No. 31,003)  
Ronald I. Eisenstein (Reg. No. 30,628)  
Henry D. Pahl, Jr. (Reg. No. 20,438)  
Peter J. Manus (Reg. No. 26,766)

David S. Resnick (Reg. No. 34,235)  
Peter F. Corless (Reg. No. 33,860)

|  |   |
|--|---|
| <b>SEND CORRESPONDENCE TO:</b><br><br>Dike, Bronstein, Roberts & Cushman, LLP<br>130 Water Street<br>Boston, Massachusetts 02109 | <b>DIRECT TELEPHONE CALLS TO:</b><br><br>(617) 523-3400 |
|--|---|

|             |                         |                       |                          |                               |
|-------------|-------------------------|-----------------------|--------------------------|-------------------------------|
| 2<br>0<br>1 | FULL NAME OF INVENTOR   | LAST NAME             | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                  | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS   | CITY                     | STATE OR COUNTRY AND ZIP CODE |
|             |                         | Nakano                | Ikuo                     |                               |
|             |                         | Kashihara-shi         | Nara Japan               | Japan                         |
|             |                         | 235-8-501, Shinga-cho | Kashihara-shi            | Nara 634-0006 Japan           |

|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 2<br>0<br>2 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |
|             |                         |                     |                          |                               |
|             |                         |                     |                          |                               |
|             |                         |                     |                          |                               |

|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 1<br>0<br>3 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |
|             |                         |                     |                          |                               |
|             |                         |                     |                          |                               |
|             |                         |                     |                          |                               |

|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 2<br>0<br>4 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |
|             |                         |                     |                          |                               |
|             |                         |                     |                          |                               |
|             |                         |                     |                          |                               |



|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 2<br>9<br>5 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |

|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 2<br>9<br>6 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |

|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 2<br>9<br>7 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |

|             |                         |                     |                          |                               |
|-------------|-------------------------|---------------------|--------------------------|-------------------------------|
| 2<br>9<br>8 | FULL NAME OF INVENTOR   | LAST NAME           | FIRST NAME               | MIDDLE NAME                   |
|             | RESIDENCE & CITIZENSHIP | CITY                | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP        |
|             | POST OFFICE ADDRESS     | POST OFFICE ADDRESS | CITY                     | STATE OR COUNTRY AND ZIP CODE |

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

|   |                           |
|---|---------------------------|
| Signature of Inventor 201<br><i>Shuo Nakano</i> | Signature of Inventor 202 |
| Date:<br>June 29, 2000                          | Date:                     |